



Removal of Crystal Ball for Skyhook Mod



ENGINEERING DEPARTMENT


1645 LEXINGTON AVENUE ♦ DELAND FL 32724-2106 ♦ TELEPHONE +1 386 736 7589 ♦ FAX +1 386 734 7537
UPT@UPTVECTOR.COM ♦ WWW.UPTVECTOR.COM

Step 1



Disconnect RSL lanyard from the RSL ring.

Step 2

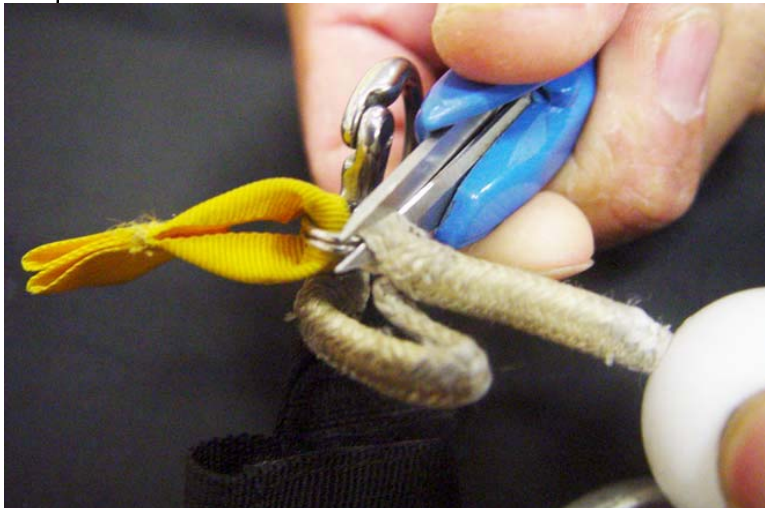

To remove the crystal ball, first cut the short piece of 600lb Dacron line connecting the Crystal Ball to the RSL shackle.



Step 3



Second, cut the remaining Dacron line attaching the Crystal Ball to the RSL Shackle.



Step 4




Remove the Velcro tab from the RSL. This tab is intended to hold the Crystal Ball in place.

These two pieces need to be removed for the Skyhook Mod.



Step 5

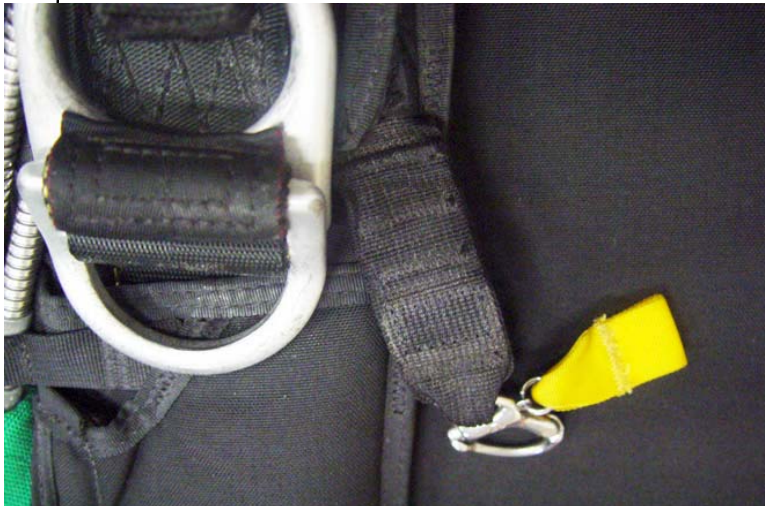

Clean RSL of any loose threads off the RSL Lanyard.

Step 6



Hook up RSL shackle back on riser RSL ring.